



For more information on various modes see Instruction Manual and Measurement and Display Manual.

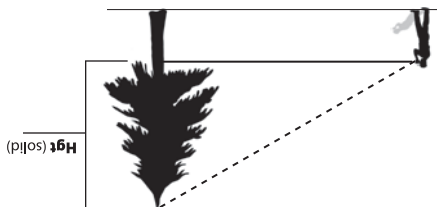

NOTE: Hgt (solid) mode can tell you the height between the rangefinder (user's eye) and the aimed point. It does not tell you the height of the target.

Hgt and +Hgt2 are solid.



4. When the measurement is successful, you see the height from the base* to the top* displayed on the internal LCD with **Hgt +Hgt2** (solid).
5. For more information, refer to the external LCD.
** "base" and "top" can be switched*



Nikon Forestry 550/Hypsometer

Start-Up Card - Nikon Forestry 550

TO START:

1. Depress the **POWER** button to turn on.
2. Point at the intended target. Depress the **POWER** button and release after the initial read-out.
3. Data of the chosen mode is displayed on the internal LCD.
4. For more information, refer to the external LCD.
5. Units can be shown in meters, yards or feet. To change between units, depress and hold the **MODE** button for approximately two seconds.