



SELF-PRIMING CENTRIFUGAL PUMPS

BULLETIN
PAP-5100E
DEC. 2006


AgMiser Series

A PROVEN DESIGN SERVING AGRICULTURE ON FIVE CONTINENTS



Features:

- Corrosion resistant polyester pump (polypropylene is optional)
- Capacities to 166 U.S. GPM (628 LPM)
- Total heads to 80 feet (24.4 meters)
- Self-priming to 20 feet (6.1 meters)
- 2" NPT female ports (polyester also available with 2" BSP threaded ports)
- Built-in check valve
- EPDM rubber parts are standard, Buna-N or Viton® are also available.
- Available gasoline engines ranging from standard to commercial duty.
- Electric, hydraulic and pneumatic motors are available as optional drive choices.

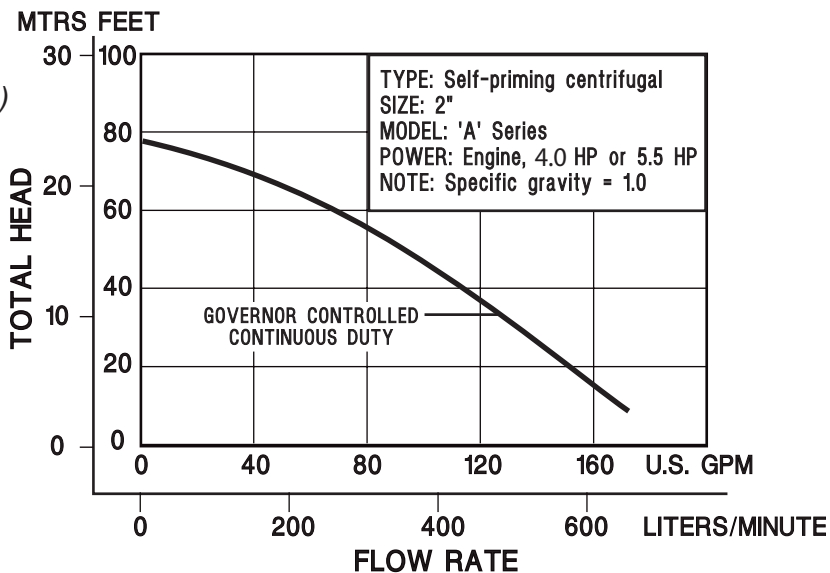

PUMP SPECIFICATIONS

MODEL	PORT SIZE	MAX. FLOW	MAX. TDH	ENGINE	MAX. S. G.	WEIGHT
AEB2WL E3C	2" NPT	166 GPM	80 ft.	4.0 HP standard B & S	1.2	40 lbs.
AEB2WL E5IC	2" NPT	166 GPM	80 ft.	5.5 HP B & S Intek OHV	1.5	48 lbs.
AEB2WLE5HC	2" NPT	166 GPM	80 ft.	5.5 HP Honda OHV	1.5	48 lbs.

F.O.B. Lancaster, Pennsylvania

Registered trademark: Viton - DuPont Dow Elastomers